


Technical drawing of the refrigerator showing top and front views with dimensions.

Top View: Shows the refrigerator's footprint with a width of 450 mm. The top panel features a control panel with four indicator lights and a dial.

Front View: Shows the refrigerator's height of 600 mm and its depth of 490 mm. The front panel includes a handle and a large glass door revealing the interior shelves.

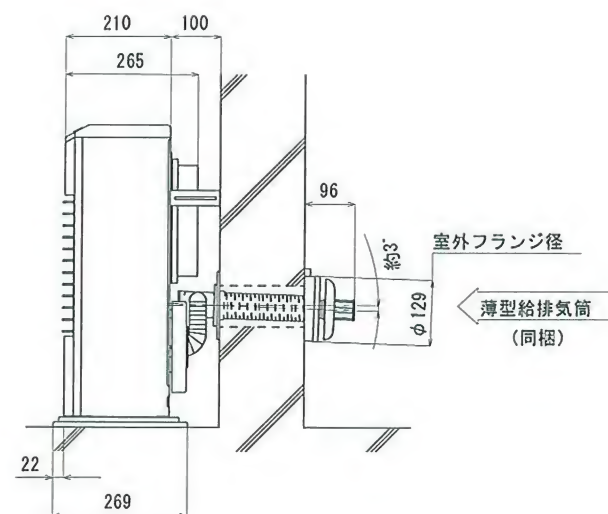

壁固定金具穴位置

455

113

212

212

R128

50°

φ 67~80 給排気筒
壁貫通穴位置

給気口

給油口

160

70

145

117

178


可燃物

10以上(※1)


60以上

可燃物

10以上(※1)

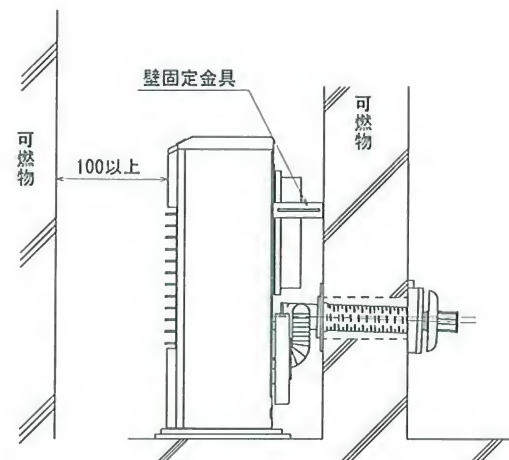





-
- 可燃物
- 給気
- 排気
- 60以上(※2)
- 60以上
- 可燃物
- 最大積雪面より
50cm以上
- 可燃物・地面・スラブ面など



仕様	
型式の呼び	FF-631TL
種類	ボット式、強制給排気形、強制対流形
外形寸法	高さ__600mm 幅__490mm 奥行__269mm
点火方式	電気点火
使用燃料	灯油 (JIS 1号灯油)
暖房出力	最大 5.22kW (4,490kcal/h)
	最小 1.34kW (1,150kcal/h)
燃料消費量	最大 6.00kW (0.583L/h)
	最小 1.54kW (0.15L/h)
エネルギー消費効率 (区分名)	87.0% (B)
排気温度	260℃以下
質量	20kg
電流ヒューズ	筒型20mm10A
電源電圧・周波数	100V 50/60Hz
定格消費電力 (50/60Hz)	最大 点火初期に短時間発生 630/630W
	点火時 335/335W
	燃焼時 43/43W
待機時消費電力	0.5W
給排気筒の型式の呼び	FWT-6W-1
給排気筒の呼び径	D40
給排気筒径	50mm
給排気筒壁貫通部穴径	67~80mm (65mm既設の穴取付可能)
安全装置	点火安全装置 対震自動消火装置
	停電安全装置 過熱防止装置
	燃焼制御装置
その他の装置	排気管抜け検知装置
付属部品	延長用短管 (1)
	ワイヤーバンド小 (2)
	ワイヤーバンド大 (2)
	給排気筒セット (1)
	排気管断熱カバー (1)
	ストッパーリング (2)
	4×25タッピンねじ (5)
	壁固定金具 (2)
	ゴム製送油管 (1.2m) (1)
	取扱説明書 (1)
	工事説明書 (1)

暖房の目安は、社団法人日本ガス石油機器工業会の自主基準によります。

品 名		FF-631TL I			形 式	
承 認	検 図	設 計	尺 度		図面番号	WY3-0412
			1 : 15		単位 mm	サンポット株式会社